



13mm x 3/4" BSP male

19mm x 19mm

25mm x 25mm









VQA34

4

Technical Specifications Sheet

For complete control over water, a Philmac Quick Action Shut Off valve allows water to be turned on or off with just a quarter turn.

Installation

Simply insert appropriate LDPE pipe manufactured to AS2698.1

Features and Benefits

Ease of Use

Rapid quarter turn on/off control.

Versatile


Straight flow in both directions.

Throttling ability with a partial turn of the handle.

Reliable

Fully tested to adverse environmental conditions. Weather Resistant.

Head Loss

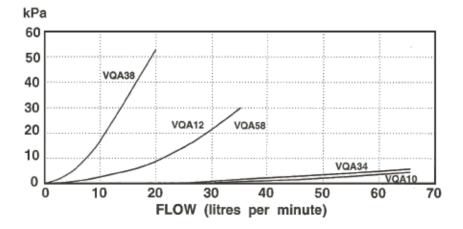

Specifications

Code	VQA38	VQA12	VQA58	VQA34	VQA10
Inlet barb to suit pipe	10mm	13mm	16mm	19mm	25mm
Outlet barb to suit pipe	10mm	13mm	16mm	19mm	25mm
Ratchet clip to suit	CT13	CT15	CT19	CT23	CT29

NOTE: We recommend the use of ratchet clips with all valves.

Recommended use:

Products described above are designed and manufactured for micro irrigation use and therefore have a maximum recommended operating pressure of 300 kPa. The products must be used with suitable filtration (where applicable) to avoid blockage or damage to working components.

Please note that the information, opinions, recommendations and advice given on this specification sheet are supplied only to provide an improved understanding of the technical aspects of Philmac valves. So far as the law allows, Philmac Pty Ltd will not accept liability in respect of any loss or damage of any kind claimed to arise as a result of reliance upon any information contained on this specification sheet. Please refer to our Terms and Conditions of Supply of goods.

For more information Ph: 1800 755 899

www.philmac.com.au www.youtube.com/user/PhilmacAustralia